





Security & Home Automation From Any Room

The 2GIG® Wireless Touchscreen Keypad enables convenient and seamless access to all the home security and automation functionality of the GC2e control panel, from anywhere in a home.

The TS2 is a wall-mounted, full color, touchscreen user interface that provides many of the same easy-to-use keypad functions available on the GC2e control panel.

Users can see and hear the system status and chimes/alerts. The TS2 makes it easy to arm and disarm the system, view sensor zones, as well as control door locks, lighting and thermostats all with the same familiar interface found on the GC2e control panel. Up to four Wireless Keypads may be installed per system, providing complete coverage in most homes.



2GIG-TS2-E

2GIG WIRELESS TOUCHSCREEN KEYPAD | SPECIFICATIONS & TECHNOLOGY

TS2 Keypad Specifications


| Wireless Signal Range | 500 ft (152.4 m), open air, with Wireless Control Panel |
|------------------------|--|
| Transceiver Frequency | 900 MHz frequency-hopping, bi-directional communication |
| Radio | 25 channel frequency-hopping spread spectrum, 403 kHz channel spacing (910.2-920.275 MHz), GFSK modulation, 128 kbps, +19dBm maximum RF power out |
| Dimensions (L x W x H) | 4.3 x 6.7 x 0.9 in (11 x 17 x 2.2 cm) |
| Weight | 8.8 oz. |
| Housing Material | ABS Plastic |
| Color | White |
| Operating Temperature | 32°-120 F° (0°-49° C) |
| Relative Humidity | 5-95% Non-Condensing |
| Operating Voltage | 14VDC |
| Certifications | FCC Part 15, Industry Canada |
| | |

Specifications and availability subject to change without notice.

Key Features

- Full color touchscreen interface
- One-touch Home and Emergency navigation
- Quick and responsive bi-directional communication with the compatible 2GIG GC2e control panel
- Add up to 4 TS2 Wireless Touchscreen Keypads to a compatible 2GIG control panel
- Access to all Z-Wave functionality
- See and hear system status, chimes and alerts
- Screen and buttons darken completely and wake with one touch
- Same easy-to-use interface as the 2GIG control panel
- · Can be used with optional power supply with DC plug
- Desktop mounting with optional 2GIG-TS1-DESK accessory
- Over the air or USB firmware updates
- 1 Year warranty

When the 900 MHz Transceiver Module (2GIG-XCVR2e-345) is installed in the GC2e control panel, the system can be programmed to communicate with up to four (4) TS2 Wireless Touchscreen Keypads.

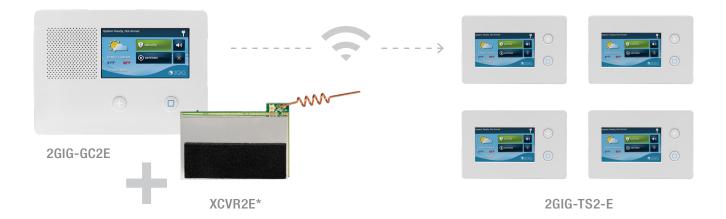

2GIG Home Security and Control Systems

Our 2GIG® products are known for their quality and field-proven reliability with more than 5 million control panels and 25 million devices deployed that boast a less than 0.03 percent failure rate—the best in the industry.

*NOTE: XCVR2e hardware installation on GC2e panel is required for use with the TS2 Wireless keypad. May also require FW updates to your main panel.

For more information, please visit the dealer portal at www.2GIG.com or contact Customer Support at www.nortekcontrol.com/technical-support/



