

2GIG NVR

Model #: 2GIG-NVR-1



2GIG NVR

Network Video Recorder

- High Profile H.264 Compression
- 4 Channel Recording full HD 1080p Real-time
- 4 PoE Ports, 802.3af
- Internal single 3.5 inch HDD
- Dual Display Output, HDMI & VGA
- Simple to use GUI with mouse control
- Zero Configuration
- Plug-n-play on private POE network



Keep an eye on your home with this Network Video Recorder (NVR) with High definition video resolution. Simple to use GUI with mouse control. Zero Configuration: Auto-Detect, Auto-Record, Auto-View, Auto-Layout.

Just plug in the PoE cameras into the back of the NVR. Easily configure WiFi camera to record to NVR. Use 2GIG NVR app to view cameras from anywhere with an Internet connection.

Key Features


- HD resolution (1920 x 1080)
- Power over Ethernet (PoE) supports 4 IP Cameras
- Plug-N-Play
- Record/playback video from 2GIG IP Cameras on browser or OSD
- Quick Setup
- HDMI and VGA video outputs
- 2GIG NVR app for Apple® iOS® (iPhone® & iPad®) and Android® devices

Includes: : Chassis, Power Supply, HDD, Mouse, User Manual, CD

Models:

2GIG-NVR1-1T 2GIG NVR, Video Storage, 4 PoE ports, Mouse, Power Supply, 1 TB HDD, White

2GIG NVR Display

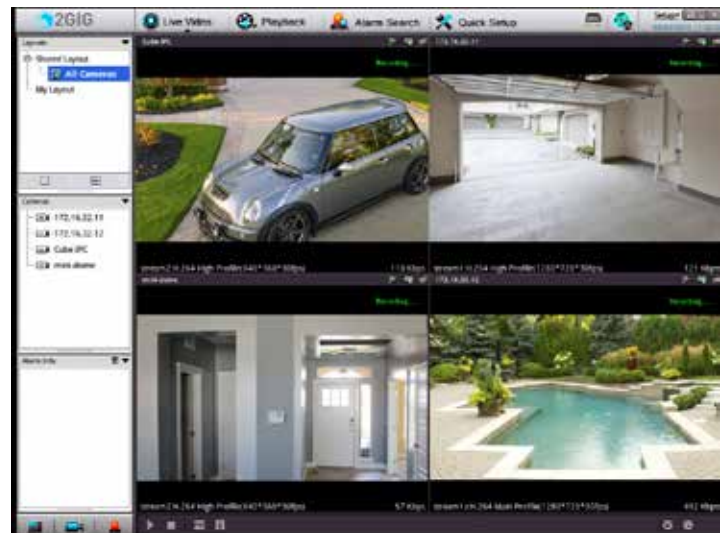

Remote Apps For iPhone®, iPad® & Android® Devices

- FREE Apps for Smart Phones and Tablets
- View live video anywhere
- Real-time video
- Playback video





Key Features

VIDEO

Recording	4 Cameras 1080p / 720p real-time video input NTSC (30 FPS)
Maximum Recording	up to 4 Cameras, maximum bit rate is 18 mbps for all cameras
Output Resolutions	1280x1024, 1024x768 or 1920x1080p
Video Decoding	H.264
Supported Cameras	2GIG-CAM-250P Series 2GIG-CAM-100W Series
Rate Control	CBR (Constant Bit Rate), VBR (Variable Bit Rate) as defined by IP device
Max. Recording Stream	18 Mbps

STORAGE

HDD	1 TB HDD (AV Class, SATA)
Recording Methods	Constant recording or motion detection

CONNECTIONS

Network	5x RJ45, 10/100Base-T, 4 are POE
Video Outputs	HDMI, VGA
Alarm I/O	Terminal block 1 alarm in 1 alarm out
Audio Input	1x 3.5mm audio input (mic)
Audio Output	1x 3.5mm audio output
USB	2 USB 2.0 ports. Supports USB mouse (included), supports USB keyboard (not included). Supports USB thumb drive for archiving video

NETWORK

Web Server	Flash Video, ActiveX
Network Protocols	RTP/RTMP, RTSP, TCP/UDP, HTTP, DHCP, DNS Client
DDNS Service Providers	NOIP (free service) & DynDNS

AUDIO

Audio Format	G711 A-Law, G711 U-Law, RAW_PCM
--------------	---------------------------------


USER INTERFACE

Local GUI	Built-in. Languages supported: English, Chinese, Spanish, Portuguese, Italian and Spanish
Remote Apps	2GIG NVR apps for Apple® iOS® (iPhone® & iPad®) & Android® devices (free download)
Browser Compatibility	Internet Explorer®, Google® Chrome®, Apple Safari®, Mozilla Fire Fox®, Opera®

PHYSICAL

Power	48V DC ± 5%, 1.35A, external power supply unit requires 120 VAC
Mouse	USB mouse included
Cooling	Heat sink, cooling fan
Operating Humidity	20% - 80% RH
Regulatory	CE / FCC / RoHS compliant
Product Dimensions (LxWxH)	260 x 175 x 50mm
Product Weight	1.3 Kg

Front of NVR

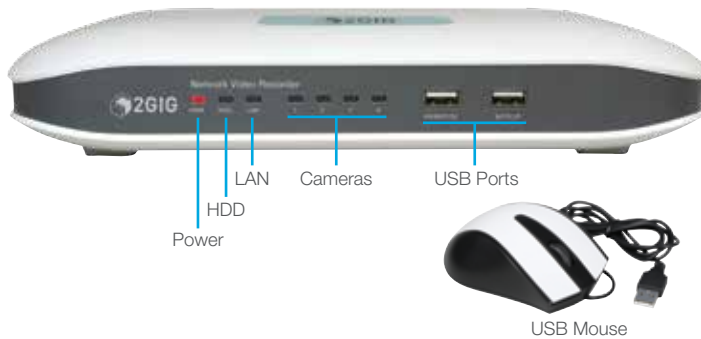

Rear of NVR, Connections

